

FORM PTO-1390 (Modified)
(Rev. 10-95)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES

P-5742

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

CONCERNING A FILING UNDER 35 U.S.C. 371

09/509302

INTERNATIONAL APPLICATION NO.
PCT/GB98/02829

INTERNATIONAL FILING DATE
September 23, 1998

PRIORITY DATE CLAIMED
September 23, 1997

TITLE OF INVENTION

SHEET JOINING METHOD AND APPARATUS AND A RIVET FOR USE IN THE METHOD

APPLICANT(S) FOR DO/EO/US

Stuart Edmund BLACKET

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 18 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☐ A **FIRST** preliminary amendment.
A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☒ Certificate of Mailing by Express Mail
19. ☒ Other items or information:

Return Receipt Postcard

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.53) 09/509302		INTERNATIONAL APPLICATION NO. PCT/GB98/02829		ATTORNEY'S DOCKET NUMBER P-5742	
20. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :				CALCULATIONS PTO USE ONLY	
<input checked="" type="checkbox"/> Search Report has been prepared by the EPO or JPO \$840.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) \$720.00 <input type="checkbox"/> No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$790.00 <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1,070.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$98.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =					
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	16 - 20 =	0	x \$18.00	\$0.00	
Independent claims	3 - 3 =	0	x \$78.00	\$0.00	
Multiple Dependent Claims (check if applicable).			<input checked="" type="checkbox"/>	\$260.00	
TOTAL OF ABOVE CALCULATIONS =				\$1,100.00	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable).				<input type="checkbox"/>	\$0.00
SUBTOTAL =				\$1,100.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00	
TOTAL NATIONAL FEE =				\$1,100.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).				<input type="checkbox"/>	\$0.00
TOTAL FEES ENCLOSED =				\$1,100.00	
				Amount to be: refunded	\$
				charged	\$

- ☐ A check in the amount of _____ to cover the above fees is enclosed.
- ☒ Please charge my Deposit Account No. **18-2284** in the amount of **\$1,100.00** to cover the above fees.
A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **18-2284** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

R. Blake Johnston
Reg. No. 41,097

PIPER MARBURY RUDNICK & WOLFE
P.O. Box 64807
Chicago, Illinois, 60664-0807

(312) 368-4000


SIGNATURE

R. Blake Johnston

NAME

41,097

REGISTRATION NUMBER

3/23/2000
DATE

09/5-09302

430 Rec'd PCT/PTO 23 MAR 2000

SHEET JOINING METHOD AND APPARATUS AND A RIVET FOR USE IN THE METHOD

This invention relates to an improved sheet joining method and apparatus.

When joining two thin metal sheets together with, e.g. rivets, there is often difficulty in achieving sufficient shear load strength. It is believed that the shear load strength can be increased by the order of 15% when a blind rivet is applied in a known manner to pre-dimpled sheets, that is sheets in which dimples have been pressed around holes formed to receive blind rivets. In many applications however it is not practical to press dimples into sheets before they are secured together.

It is an object of the present invention to provide a joining method and apparatus capable of providing increased joint shear load strength.

According to the present invention, there is provided a method for joining together two or more superimposed generally planar sheets by setting a fastener in engagement with the sheets at a predetermined location, wherein the superimposed planar sheets are placed in a fastener setting and a sheet deforming assembly, and the assembly is operated to set a fastener into the sheet and to deform the sheets out of their planes around the predetermined location.

The term "fastener" is used herein to include rivets, screws and the like.

The invention also provides an apparatus for carrying out the above method.

The invention further provides an apparatus for joining together two or more superimposed generally planar sheets by setting a fastener in engagement with the sheets at a predetermined location, the apparatus comprising an assembly which is operative to receive superimposed planar sheets and to set a fastener in engagement with the sheets and to deform the sheets around the predetermined location out of their planes either before, during or after fastener setting.

The invention further provides a rivet for use in accordance with the above mentioned method, comprising a head the thickness of which increases in the radially outwards direction to define a convex surface beneath the head.

The invention further provides a method for joining two or more sheet materials with a fastener, wherein the sheet materials are deformed by a die to form an annular deformation engaged between a head and a free end of a stem or shank of the fastener.

SUBSTITUTE SHEET (RULE 26)

The deformation may comprise an annular projection or groove, or a ridge, or a plurality of dimples.

The sheets may be deformed before the fastener is set, for example by clamping the sheets together before the fastener is set. The sheets may be clamped together until the fastener has been set, or unclamped before the fastener is set. In one embodiment, the sheets are clamped together between a clamping member and a die shaped such that the sheets are deformed between the clamping member and the die. The sheets may be supported around the predetermined location by a support surface defining a recess into which the sheets are deformed by a head portion of the fastener.

Alternatively, the sheets may be deformed after the fastener is set, for example by clamping the sheets to be deformed between a clamping member and a die shaped such that the sheets are deformed between the clamping member and the die.

In a further alternative method, the sheets may be deformed and the fastener may be set simultaneously. For example, the sheets may be deformed by supporting the sheets on a die defining a recess extending around the predetermined location, a head portion of the fastener driving the sheets into the recess when the fastener is set. The sheets may be clamped against the surface of the die outside the said recess during the setting of the fastener. The fastener head may increase in thickness towards its periphery so as to define a convex surface facing the die and matching the shape of the recess formed in the die.

To enable the invention to be fully understood, a number of preferred embodiments will now be described with reference to the accompanying drawings, in which:

FIG 1 is a sectional side view showing the joining of two metal sheets using a standard semi-tubular rivet and die in a conventional manner;

FIG 2 is a similar view to that of FIG 1 showing the joining of two sheets in accordance with a first embodiment of the present invention using a standard semi-tubular rivet and a recessed die;

FIG 3 is a similar view to that of FIG 1 showing the joining of two sheets in accordance with a second embodiment of the present invention using a large headed rivet and a recessed die;

FIG 4 is a sectional side view showing the joining of two sheets where the material around the rivet head is "coined" or deformed in accordance with a third embodiment of the present invention;

FIG 5 is a similar view to that of FIG 4 showing the formation of a rib around a rivet head in accordance with a fourth embodiment of the present invention;

FIG 6 shows the formation of a rib around a rivet head in accordance with a fifth embodiment of the present invention.

FIG 7 shows the formation of a "coined" deformation under a rivet head in accordance with a sixth embodiment of the present invention; and

FIG 8 is a sectional side view of a spring-loaded upsetting die suitable for use in accordance with the present invention.

As shown in FIG 1, in a conventional method of joining metal sheets 11, 12 with a semi-tubular rivet 10, a punch (not shown) forces the rivet and metal sheets 11, 12 into a die 13 and the deformation of the metal sheet and of the shank 14 of the rivet locks the metal sheets together.

To improve the shear strength, as shown in FIG 2 and in accordance with the present invention, a rivet 110 and metal sheets 111 and 112 may be driven by a punch 115 into a die 113 where the metal sheets are deformed from the planes in which they initially lie into an annular recess 116 to form a counter-sink around a rivet head 117. The metal sheets are clamped to the die 113 by a pre-clamping head 118, that is the head 118 is applied against the sheets 111, 112 before and during rivet insertion. The sheets are deformed simultaneously with setting of the rivet.

A similar method to that of FIG 2 may be employed for large headed rivets as shown in FIG 3.

Referring now to FIG 4, a die 213 defines a wider annular recess 216 and a pre-clamping head 218 has a nose 219 which deforms metal sheets 211, 212 into the recess to form an annular deformation about a head 217 of a rivet 210, i.e. the metal sheets 211, 212 are "coined" around the rivet head 217. The pre-clamping force is sufficient to prevent relative movement between the adjacent sheets, and may be for example of the order of 1 tonne. The sheets are deformed into the recess 216 before the rivet is set. Alternatively, the "coining" of the metal sheets 211, 212 may be effected by using the head 218 to engage the metal sheets only after the rivet 210 has

been set, such that the sheets 211, 212 are fully deformed into the recess 216 after the rivet is set.

In the embodiment of FIG 5, a die 313 has an annular recess 316 spaced from a bore 320 of the die. A clamping head 318 supports a projection 318 which deforms metal sheets 311, 312 into a recess 316 to form a flush ribbing effect around a head 317 of a rivet 310 which is driven in by a punch 315. The clamping head 318 may be pressed against the metal sheets either before the rivet is driven in, after the rivet is driven in, or before and during the driving in of the rivet. This will increase the shear load strength and stiffness of the joint.

In the embodiment of FIG 6, metal sheets 411 and 412 are again formed to provide a raised annular rib about the head 417 of the rivet 410 where the die 413 has an annular protrusion (or ridge) 416 about the bore 420 of the die. The ribbing effect may be generated by a nose portion 419 which is complementary with the recess 416 on a clamping head 418. Once again, the clamping head 418 may be applied to the sheets 411, 412 before, after or during rivet setting.

Referring now to FIG 7, a die 513 has an inwardly-directed shoulder 516 in a bore 520. As a rivet 510 is set to join metal sheets 511, 512, the sheets are deformed inwardly to form an annular coining ring between a head 517 of the rivet and a shank 514 of the rivet 510. In this embodiment, the metal sheets 511, 512 are clamped to the die 513 by a clamping head 518 before a punch 515 is advanced to engage the rivet 510. Sheet deformation occurs simultaneously with rivet insertion.

As an alternative to continuous deformation about the rivet head, the metal sheets may be deformed into a series of "dimples" about the rivet head. Dimples may be of two different types, that is where a top sheet is sheared so as to be in effect cut, and where the top sheet is pressed into an adjacent sheet but is not cut.

Referring now to FIG 8, a die 613 has a fixed outer annular body 621 and an inner core 622 urged upwardly by a spring 623. The die 613 reduces the tendency to cracking of metal sheets 611, 612 as the sheets will initially be coined into a recess 616 before the deformation of the metal sheets 611, 612 by a shank 614 of a rivet 610 occurs, i.e. the deformation of the metal occurs in stages. Sheet deformation occurs primarily after rivet setting.

It is believed that the formation of deformations around a fastener such as a rivet in accordance with the present invention can increase the peel strength of a joint by of the order of 10% as well as producing significant improvements in shear strength and repeatability.

Deformation of sheets to be joined before a rivet is set not only improves joint strength but can in addition ensure that the following process of self-piercing riveting is fully isolated from any effects or reaction from the sheets surrounding the location at which the rivet is to be set. Thus whereas pre-clamping of sheets before self-piercing riveting improves joint quality as described for example in US patent 5,752,305, pre-deformation of the sheets around the site of the rivet can provide further improvements in joint quality and in particular can reduce the standard deviation of self-pierce riveted joint performance. This can be particularly important where it is difficult by simple pre-clamping of the sheets together to avoid effects from the surrounding sheets and prevents relative movements, for example when the sheets have surfaces treated with a lubricant or grease, for example when joining aluminium sheets carrying dry film die lubricant coatings.

Although it is believed desirable to pre-deform the sheets around the rivet site and to maintain a high clamping force on the sheets during rivet insertion to achieve very high quality joints, in some circumstances it is possible to release the pre-clamping force after deformation but before the rivet is driven in. The use of such a method can have advantages in particular situations as the overall assembly which supports the die against which the sheets to be riveted are clamped need not be as robust. If the clamping force is maintained during rivet insertion, the assembly must support the sum of the pre-clamping and rivet insertion forces. If the clamping force is relieved during rivet insertion, the overall assembly need only be sufficiently robust to support the larger of these two forces.

The forces necessary to deform the sheets and drive in self-piercing rivets will to an extent be a function of the physical characteristics of the sheets to be joined. With relatively thick sheets, or sheets which resist deformation, it may be necessary to use relatively high kinetic forces to achieve the necessary performance. With relatively thin sheets, or sheets which can be relatively easily deformed, the necessary

pre-clamping forces may be achieved with low velocity components driven by for example hydraulic actuators.

Descriptive Statistics		Univariate Analysis		Multivariate Analysis	
Variable	Mean (SD)	OR (95% CI)	OR (95% CI)	OR (95% CI)	OR (95% CI)
Age (years)	65.2 (10.5)	1.02 (1.01, 1.03)	1.01 (1.00, 1.02)	1.00 (0.99, 1.01)	1.00 (0.99, 1.01)
Gender					
Male	58.5 (11.2)	1.00	1.00	1.00	1.00
Female	71.8 (9.8)	1.05 (1.02, 1.08)	1.04 (1.01, 1.07)	1.03 (1.00, 1.06)	1.02 (0.99, 1.05)
Education (years)	12.5 (2.1)	1.01 (1.00, 1.02)	1.00 (0.99, 1.01)	0.99 (0.98, 1.00)	0.98 (0.97, 0.99)
Income (\$1000s)	25.3 (15.7)	1.01 (1.00, 1.02)	1.00 (0.99, 1.01)	0.99 (0.98, 1.00)	0.98 (0.97, 0.99)
Health Insurance					
Medicaid	18.2 (12.5)	1.00	1.00	1.00	1.00
Medicare	62.5 (11.8)	1.03 (1.01, 1.05)	1.02 (1.00, 1.04)	1.01 (0.99, 1.03)	1.00 (0.98, 1.02)
Private	19.3 (13.1)	1.04 (1.02, 1.06)	1.03 (1.01, 1.05)	1.02 (1.00, 1.04)	1.01 (0.99, 1.03)
None	1.0 (0.5)	1.05 (1.01, 1.09)	1.04 (1.00, 1.08)	1.03 (0.99, 1.07)	1.02 (0.98, 1.06)
Marital Status					
Married	55.8 (10.5)	1.00	1.00	1.00	1.00
Widowed	68.2 (11.2)	1.02 (1.00, 1.04)	1.01 (0.99, 1.03)	1.00 (0.98, 1.02)	0.99 (0.97, 1.01)
Divorced	62.5 (12.1)	1.01 (0.99, 1.03)	1.00 (0.98, 1.02)	0.99 (0.97, 1.01)	0.98 (0.96, 1.00)
Single	71.5 (9.5)	1.03 (1.01, 1.05)	1.02 (1.00, 1.04)	1.01 (0.99, 1.03)	1.00 (0.98, 1.02)
Employment					
Employed	15.2 (10.8)	1.00	1.00	1.00	1.00
Unemployed	50.5 (12.5)	1.01 (0.99, 1.03)	1.00 (0.98, 1.02)	0.99 (0.97, 1.01)	0.98 (0.96, 1.00)
Retired	34.3 (11.2)	1.02 (1.00, 1.04)	1.01 (0.99, 1.03)	1.00 (0.98, 1.02)	0.99 (0.97, 1.01)
Home Ownership					
Owned	65.8 (11.5)	1.00	1.00	1.00	1.00
Rented	34.2 (12.1)	1.01 (0.99, 1.03)	1.00 (0.98, 1.02)	0.99 (0.97, 1.01)	0.98 (0.96, 1.00)
Transportation					
Owns car	55.2 (10.8)	1.00	1.00	1.00	1.00
Does not own	40.8 (11.5)	1.02 (1.00, 1.04)	1.01 (0.99, 1.03)	1.00 (0.98, 1.02)	0.99 (0.97, 1.01)
Health Status					
Excellent	12.5 (8.5)	1.00	1.00	1.00	1.00
Good	35.2 (12.1)	1.01 (0.99, 1.03)	1.00 (0.98, 1.02)	0.99 (0.97, 1.01)	0.98 (0.96, 1.00)
Fair	28.5 (11.5)	1.02 (1.00, 1.04)	1.01 (0.99, 1.03)	1.00 (0.98, 1.02)	0.99 (0.97, 1.01)
Poor	23.8 (10.5)	1.03 (1.01, 1.05)	1.02 (1.00, 1.04)	1.01 (0.99, 1.03)	1.00 (0.98, 1.02)
Functional Status					
Independent	55.2 (10.8)	1.00	1.00	1.00	1.00
Needs help	44.8 (11.5)	1.01 (0.99, 1.03)	1.00 (0.98, 1.02)	0.99 (0.97, 1.01)	0.98 (0.96, 1.00)
Dependent	1.0 (0.5)	1.02 (1.00, 1.04)	1.01 (0.99, 1.03)	1.00 (0.98, 1.02)	0.99 (0.97, 1.01)

CLAIMS

1. A method for joining together two or more superimposed generally planar sheets by setting a fastener in engagement with the sheets at a predetermined location, wherein the superimposed planar sheets are placed in a fastener setting and sheet deforming assembly, and the assembly is operated to set a fastener into the sheets and to deform all the sheets out of their planes outside the predetermined location.
2. A method according to claim 1, wherein the sheets are deformed before the fastener is set.
3. A method according to claim 2, wherein the sheets are clamped together before the fastener is set.
4. A method according to claim 3, wherein the sheets are clamped together until the fastener has been set.
5. A method according to claim 3, wherein the sheets are unclamped before the fastener is set.
6. A method according to claim 3, 4 or 5 wherein the sheets are clamped together between a clamping member and a die shaped such that the sheets are deformed between the clamping member and the die.
7. A method according to claim 2, 3, 4, 5 or 6 wherein the sheets are supported around the predetermined location by a support surface defining a recess into which the sheets are deformed by a head portion of the fastener.
8. A method according to claim 1, wherein the sheets are deformed after the fastener is set.

AMENDED SHEET

9. A method according to claim 8, wherein the sheets to be deformed are clamped between a clamping member and a die shaped such that the sheets are deformed between the clamping member and the die.
10. A method according to claim 1, wherein the sheets are deformed and the fastener is set simultaneously.
11. A method according to claim 10, wherein the sheets are deformed by supporting the sheets on a die defining a recess extending around the predetermined location, a head portion of the fastener driving the sheets into the recess when the fastener is set.
12. A method according to claim 11, wherein the sheets are clamped against the surface of the die outside the said recess during the setting of the fastener.
13. A method according to claim 11 or 12, wherein the fastener head increases in thickness towards its periphery so as to define a convex surface facing the recess formed in the die.
14. An apparatus for joining together two or more superimposed generally planar sheets by setting a fastener in engagement with the sheets at a predetermined location, the apparatus comprising an assembly which is operative to receive superimposed planar sheets and to set a fastener in engagement with the sheets and to deform all the sheets outside the predetermined location out of their planes either before, during or after fastener setting.
15. A rivet for use in accordance with the method of claim 1, comprising a head the thickness of which increases continually in the radially outwards direction to define a convex surface beneath the head.

AMENDED SHEET

16. A method for joining two or more sheet materials with a fastener, wherein the sheet materials are deformed by abutment with a die surface to form an annular deformation engaged between a head and a free end of a stem or shank of the fastener.

0022090" 20E60560

AMENDED SHEET

09/509302

PCT/GB98/02829

WO 99/15288

1-3

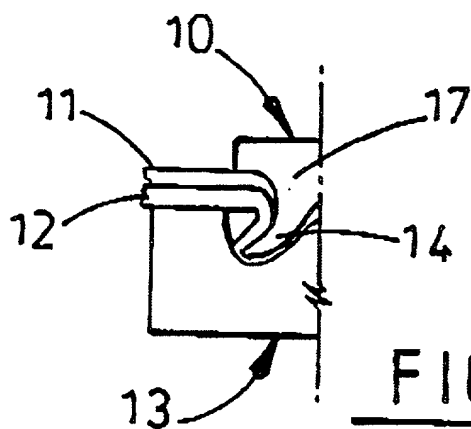


FIG. 1

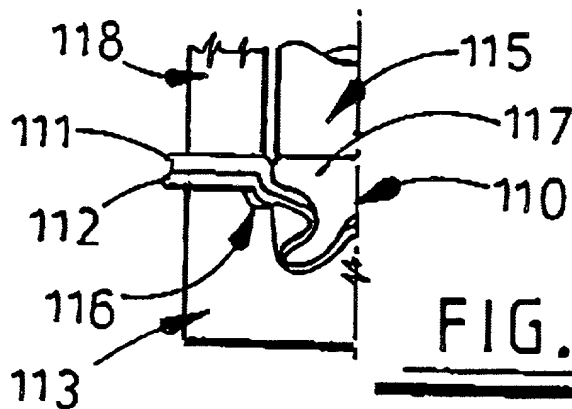


FIG. 2






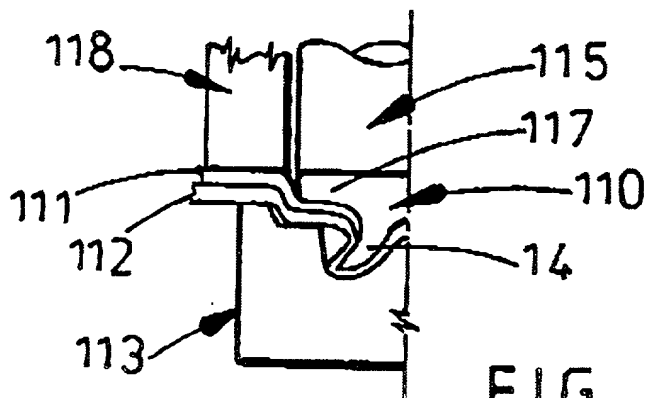


FIG. 3

002090-20E60560

2-3

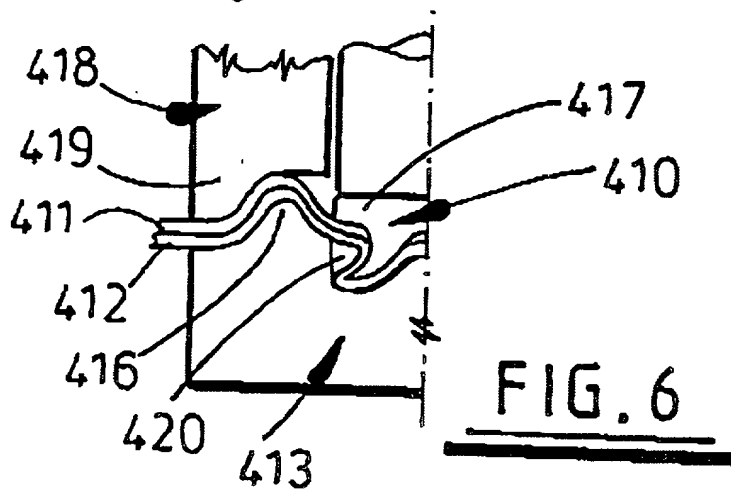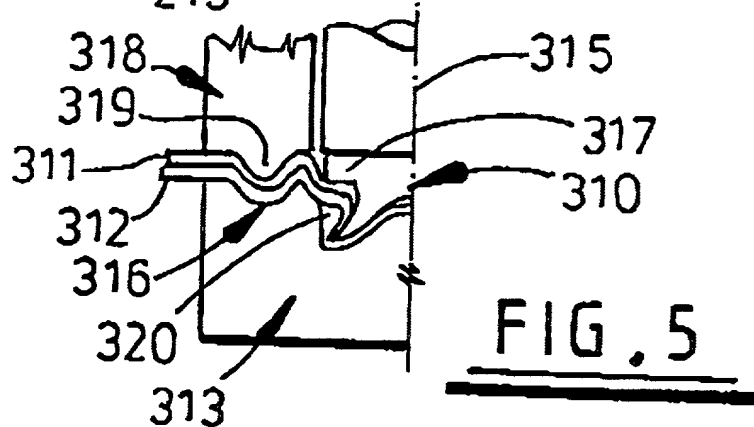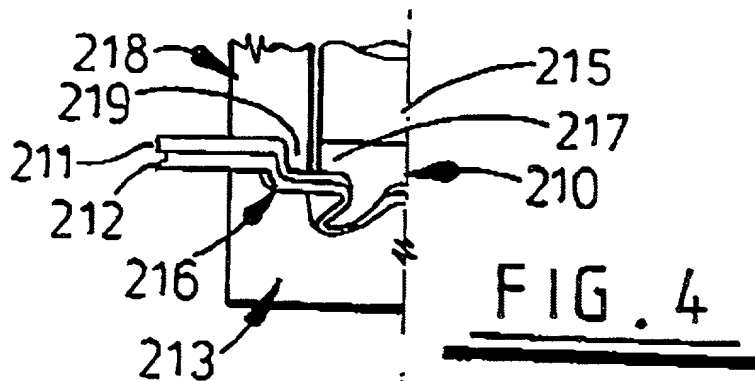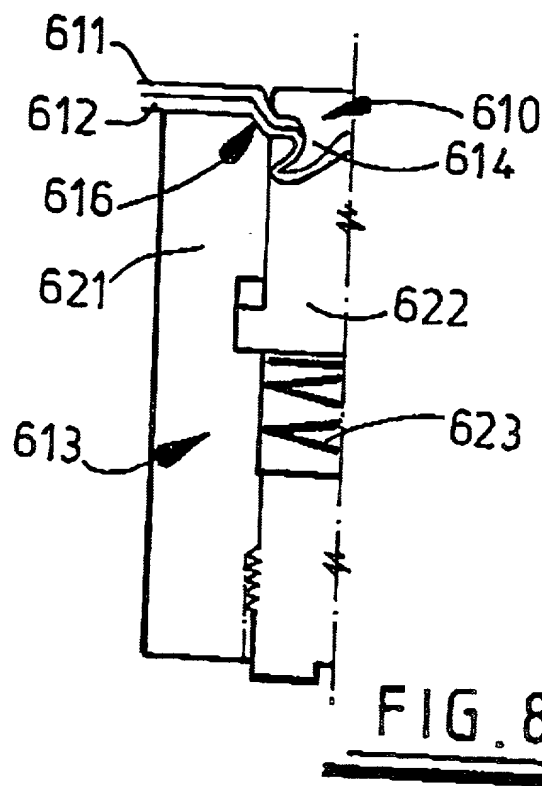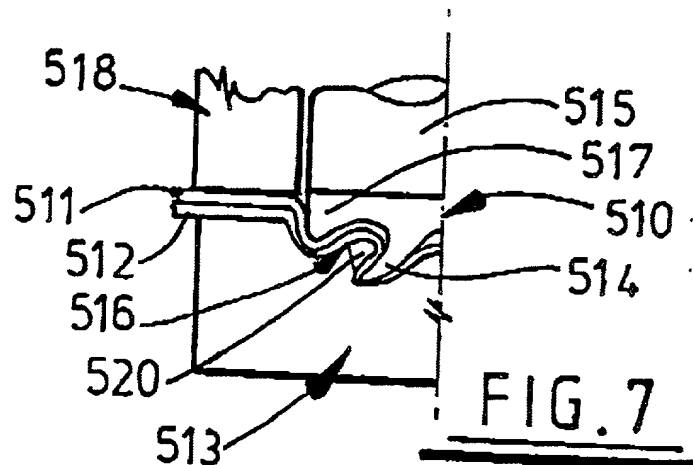

3-3

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

PCT/GB98/02829

23 September 1998

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

James P. Ryther	<u>20,424</u>
William T. Rifkin	<u>26,501</u>
Mark I. Feldman	<u>26,880</u>
Mary S. Burns	<u>32,116</u>
Michael L. Kenaga	<u>34,639</u>
R. Blake Johnston	<u>41,097</u>
David J. Richter	<u>26,221</u>
Thomas W. Ryan	<u>43,072</u>
Arik Ranson	<u>43,874</u>

9

Send Correspondence to: R. Blake Johnston
Piper Marbury Rudnick & Wolfe
P.O. Box 64807
Chicago, IL 60664-0807

Direct Telephone Calls to: (name and telephone number)
R. Blake Johnston, (312) 368-8921

Full name of sole or first inventor Stuart Edmund BLACKET	
Sole or first inventor's signature 	Date X 16.05.00
Residence AUSTRALIA	
Citizenship AUSTRALIA	
Post Office Address 3 Woods Road	
Closeburn, QLD 4520, AUSTRALIA <i>Alux</i>	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	